

## Order Form - Progeo TEKNA TILT 2.0

	D	(ab)	CRAS	SH TEST APPROVED
Date	Progeo (Eng 			
User		tamp	Foldina tiltina fi	rame wheelchair
End user wheight (kg)				
Language user manual	Responsible	] بــــــــــــــــــــــــــــــــــــ		
[	Informatio	a on ond usor		
		n on end user		
End user pathology : Presence of dystonia or important sp			eight (kg):Kg	
	sures - The tolerance on all the			) mm
		vidth (LS)		
MODEL A			MODEL JUNIO	
□ 33 □ 36 □ 39 □ O kit to increase seat width (LS + 3cn ☆ Not mounted □ Mount		0 kit to increase s A Not moun	seat width (LS + 3cm)	36 □ 39 11476
Seat depth (PS) - adjustable!				PS
Short frame □ 35 □ 37,5 □ 40	Medium frame □ 40   □ 42,5   [	□ 45 □ <sup>∠</sup>	Long frame I5 □ 47,5 □ 50	sition 1 1
PS 37,5 PS 35 ••••	PS 42,5	PS 47	45	Backrest tube position
3 2 1 ↑ ( PS 40 )	3 2 1 (PS 45)	321 ▲ (PS 50)		
Footplate distance (DP) - (Real distance between seat and footplate)         IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm)         Minimum footplate distance ~22cm         ±0.5cm - adjustment steps 1.5cm				
Seat height (parallel to the ground)			<b>D</b>	
	Rear wheels16"22"24"		12" 16"	wheels 22" 24"
	□ 42 □ 43,3 □ 43,3 □ 44,5 □ 44,5 □ 45,8 □ 45,8 ] 47 □ 47 ] 48,3 □ 48,3	CASTERS 7"	□ 44,5 □ 45,8 □ 47 □ 47 □ 48,3	□ 44,5 □ 44,5 □ 45,8 □ 45,8 □ 47 □ 48,3
Front frame		Front	frame, swing away, and i	removable
☆ Straight frame (not available for seat width 27)		→ 110°		<b>₽</b> 95°
				(Exclude the installation of casters 7")
<ul> <li>Frame with abduction 6cm</li> <li>not available for seat width 42 - 45 - 48</li> <li>Maximum footplate distance 42</li> </ul>		) Front	frame, swing away, and the frame, swing away, and the framework of the fr	removable
O Elevating front frame, swing away an not available for seat width 27 - 30 - 33 Minimum footplate distance 25cm.	d removable	Include calf supp plastic footrest w band		09730



# Order Form - Progeo TEKNA TILT 2.0

Frame colour (without extra charge)	
☆ Opaque black □ AVIO blue □ Pearl white □ Matt orange	
□ Tekno anthracite □ Matt grey □ Matt red	
O Bright red O Bright fuchsia O Bright lime O Bright blue china 0972	29
One piece Push handle for companion Backrest	
One piece Push handle with tilting control -	
REMOVABLE adjustable angle from -4° to +12°	
adjustable angle	9728
adjustable angle from -4° to +12°	19720
With fixed back(non-folding back) adjustable distance 30÷70cm	
(to the seat)	
With folding back backrest (Non-folding back)	0090
adjustable distance 20+60cm / The real seat depth, from the front part of the	
(to the seat)	
more than the declared one.	_
	-
Backrest upholstery ☆ WITH NO backrest upholstery, NOR tension adjustment straps	
Backrest Height (TS) (std 42cm)	
• · · · · · · · · · · · · · · · · · · ·	4693
With fixed back(non-folding back)->minimum height 39cm Backrest Height (TS)	
Casters ☆ 6" Soft	
□ 6" Pneumatic	
□ 7" Soft Not available with: Front frame 95°	
Rear wheels ☆ 12" transit rear wheels - Anti-puncture	
□ 12" transit rear wheels - Pneumatic	
□ 16" transit rear wheels - Pneumatic	
	4696 4696
○ 24" Ultra-light "Spinergy LX" 04	14696 14691
	7848 2270
	4690
	4105
	)4107 )3385
O 24" with brake handles for companion (drum brake) (aluminium handrim)	3384
Colour rear wheels	
Only standard Progeo 22"/24" wheels have coloured hubs and rims ☆ Black 22" 24"	
O Bright silver 22" 24" 00833	
O Bright lime         22" 24"         00833           O Bright blue         22" 24"         00833	
O Bright red 22" 24" 00833	
O Bright fuchsia         22" 24"         00833           O Pearl white         22" 24"         00833	
O Tekno anthracite 22" 24" 00833	3
O Matt Midnight blue         22" 24"         00833           O Matt grey         22" 24"         00833	
O Matt grey         22" 24"         00833           O Matt red         22" 24"         00833           Handrim         Wheel distance ★ 3 cm         □ 4 cm	
O Matt grey         22" 24"         00833           O Matt red         22" 24"         00833           Handrim         Wheel distance ★ 3 cm         □ 4 cm           ☆ Aluminium         (22-24")         □ 4 cm	
O Matt grey         22" 24"         00833           O Matt red         22" 24"         00833           Handrim         Wheel distance ☆ 3 cm         □ 4 cm           ☆ Aluminium         (22-24")         0           O Aluminium black SOFT-TOUCH         (24")         0           O Chromed Steel         (24")         0	3 99170 91684
O Matt grey         22" 24"         00833           O Matt red         22" 24"         00833           Handrim         Wheel distance ☆ 3 cm         I 4 cm           ☆ Aluminium         (22-24")         0           O Aluminium black SOFT-TOUCH         (24")         0           O Chromed Steel         (24")         0           O Titanium         (24")         0	3 99170
O Matt grey         22" 24"         00833           O Matt red         22" 24"         00833           Handrim         Wheel distance ★ 3 cm         I 4 cm           ☆ Aluminium         (22-24")         0           O Aluminium black SOFT-TOUCH         (24")         0           O Chromed Steel         (24")         0           O Titanium         (24")         0           O Ultra Grepp         (24")         0	3 99170 11684 90016
O Matt grey       22" 24"       00833         O Matt red       22" 24"       00833         Handrim       Wheel distance ★ 3 cm       □ 4 cm         ☆ Aluminium       (22-24")       0         ○ Aluminium black SOFT-TOUCH       (24")       00         ○ Chromed Steel       (24")       00         ○ Titanium       (24")       00         ○ Ultra Grepp       (24")       00         ○ Max Grepp       (24")       00	3 19170 11684 10016 10017
O Matt grey       22" 24"       00833         O Matt red       22" 24"       00833         Handrim       Wheel distance ★ 3 cm       □ 4 cm         ☆ Aluminium       (22-24")       0         O Aluminium black SOFT-TOUCH       (24")       0         O Chromed Steel       (24")       0         O Titanium       (24")       0         O Ultra Grepp       (24")       0         O Max Grepp       (24")       0	3 19170 11684 10016 10017 10834
○ Matt grey       22" 24"       00833         ○ Matt red       22" 24"       00833         Handrim       Wheel distance ★ 3 cm       □ 4 cm         ☆ Aluminium       (22-24")       0         ○ Aluminium black SOFT-TOUCH       (24")       0         ○ Chromed Steel       (24")       0         ○ Titanium       (24")       0         ○ Ultra Grepp       (24")       0         ○ Max Grepp       (24")       0         ○ TOP FRICTION       (24")       0         ○ NOVA H       (24")       1	3 19170 11684 10016 10017 10834
○ Matt grey       22" 24"       00833         ○ Matt red       22" 24"       00833         Handrim       Wheel distance ★ 3 cm       □ 4 cm         ☆ Aluminium       (22-24")       0         ○ Aluminium black SOFT-TOUCH       (24")       0         ○ Chromed Steel       (24")       0         ○ Titanium       (24")       0         ○ Ultra Grepp       (24")       0         ○ Max Grepp       (24")       0         ○ TOP FRICTION       (24")       0         ○ NOVA H       (24")       1'         ● NOVA H       (24")       1'         ● Rignonnic black profile       (24")       1'	3 99170 11684 90016 90017 90834 1023 1025
○ Matt grey       22" 24"       00833         ○ Matt red       22" 24"       00833         Handrim       Wheel distance ★ 3 cm       □ 4 cm         ☆ Aluminium       (22-24")       0         ○ Aluminium black SOFT-TOUCH       (24")       0         ○ Chromed Steel       (24")       0         ○ Titanium       (24")       0         ○ Ultra Grepp       (24")       0         ○ Max Grepp       (24")       0         ○ TOP FRICTION       (24")       0         ○ NOVA H       (24")       1'         ● NOVA H       (24")       1'         ● Rignonnic black profile       (24")       1'	3 19170 11684 10016 10017 10834 1023
○ Matt grey       22" 24"       00833         ○ Matt red       22" 24"       00833         Handrim       Wheel distance ★ 3 cm       □ 4 cm         ☆ Aluminium       (22-24")       0         ○ Aluminium black SOFT-TOUCH       (24")       0         ○ Chromed Steel       (24")       0         ○ Titanium       (24")       0         ○ Ultra Grepp       (24")       0         ○ Max Grepp       (24")       0         ○ TOP FRICTION       (24")       0         ○ NOVA H       (24")       1'         Ergonomic black profile       (24")       1'         ○ NOVA D       (24")       1'         Ergonomic profile with rubber coating (ideal for quadriplegics)       1'	3 99170 11684 90016 90017 90834 1023 1025
○ Matt grey       22" 24"       00833         ○ Matt red       22" 24"       00833         ○ Matt red       22" 24"       00833         ● Aluminium       (22-24")       04         ○ Aluminium black SOFT-TOUCH       (24")       06         ○ Chromed Steel       (24")       06         ○ Chromed Steel       (24")       06         ○ Ultra Grepp       (24")       06         ○ Ultra Grepp       (24")       06         ○ TOP FRICTION       (24")       06         ○ TOP FRICTION       (24")       06         ○ TOP FRICTION       (24")       11         ○ Val countour with a rubber insert       06         ○ NOVA H       (24")       11         Ergonomic black profile       0       11         ○ NOVA D       (24")       11         ● Quad       (24")       11	3 99170 11684 90016 90017 90834 1023 1025



# Order Form - Progeo TEKNA TILT 2.0

Date	Order	User		Address	
<b>Rear wheel</b> ☆ High pressure		(22-24")			
□ High pressure	profile tyre	(24")			
<ul> <li>O Marathon Plus</li> <li>O Anti-puncture -</li> <li>O Anti-puncture -</li> <li>Not available</li> </ul>	Colour Grey	(22") (24")	ith anti-puncture protection		01669 04181 11083
Wheel locks	3				
A Bent lever pus	h to lock			1 Alexandre	
□ Straight lever p □ Straight lever p					
	ension lever push to lock ension lever pull to lock				01949 03372
Footplate (N	Not available with Elevating fro	nt frame, swing away	and removable		
	, rake adjustable te distance ~22cm 1: Front frame with levating footrest, s	wing away and removable			11525
Not available for	ninium footplate - Flip-up! rake a seat width 27-30 with straight front fra te distance ~21cm				09727
Not available with	n: Front frame with levating footrest, s		nternal 🗆 2/3 External 🗆	External	
				External	
Removable	armrest with ABS mudguard				
☆ Desk armrests	PROGEO	(Removable and height adjust	stable)		
	nrest with ABS straight sideguar tween seat and armrest pads (cr		stable) □ 25 ☆ 27 □ 29		
SAFETY	un system rings				09654
O 4 points tie-dow The use of a h	wn system rings leadrest during transport is mandator ust be carried out by the manufacture			CRASH TEST OPPROVED	08654
O 4 points tie-dov The use of a h (installation mu	neadrest during transport is mandator ust be carried out by the manufacture <b>s</b>			CRASH TEST OPPROVED	
<ul> <li>4 points tie-dov The use of a h (installation million</li> <li>Accessorie:</li> <li>O Pad for front fro O Removable store</li> </ul>	neadrest during transport is mandator ust be carried out by the manufacture <b>s</b>			CRASH TEST APPROVED	08654 07058 09811
<ul> <li>O 4 points tie-dow The use of a h (installation m</li> <li>Accessories</li> <li>O Pad for front fra</li> <li>O Removable stor</li> <li>Optional 1</li> <li>☆ Anti-tipper with</li> </ul>	eadrest during transport is mandator ust be carried out by the manufacture <b>s</b> ame protectors orage bag (with quick coupling)		he encumbrance)	CRASH TEST OPPOUED CRASH TEST OPPOUED CRACKED IT TO SE	07058
<ul> <li>O 4 points tie-dow The use of a h (installation m</li> <li>Accessories</li> <li>O Pad for front fra</li> <li>O Removable stor</li> <li>Optional 1</li> <li>☆ Anti-tipper with</li> </ul>	eadrest during transport is mandator ust be carried out by the manufacture s ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE	r <u>)</u>		CRASH TEST CARRON	07058
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Accessorie:</li> <li>O Pad for front fra</li> <li>O Removable stor</li> <li>Optional 1</li> <li>☆ Anti-tipper with INCLUDED</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st	r) (inside rotation to reduce f		CRASH TEST CORRECTION	07058 09811
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Accessorie:</li> <li>O Pad for front fra</li> <li>O Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>O Super Head re</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st	r) (inside rotation to reduce f		CRASH TEST CONCERNING	07058 09811 11477
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Pad for front fra</li> <li>Pad for front fra</li> <li>Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>O Super Head re</li> <li>O Transit wheels</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st	(inside rotation to reduce t (Folding with the wheelcha		CRASH TEST OPPOLE	07058 09811 11477 00836 00025
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Pad for front fra</li> <li>Pad for front fra</li> <li>Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>Super Head re</li> <li>O Transit wheels</li> <li>O Tipping aid</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st	(inside rotation to reduce t (Folding with the wheelcha O Right O Left O Right		CRASH TEST COCCUSION	07058 09811 11477 00836 00025 01046 00838
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Pad for front fra O Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>Super Head re</li> <li>O Transit wheels</li> <li>O Tipping aid</li> <li>O Crutches support</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st	(inside rotation to reduce t (Folding with the wheelcha O Right O Left O Right		CRASH TEST COCCUSION	07058 09811 11477 00836 00025 01046 00838
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Accessorie:</li> <li>O Pad for front fra</li> <li>Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>O Super Head re</li> <li>O Transit wheels</li> <li>O Tripping aid</li> <li>C Crutches support</li> </ul>	eadrest during transport is mandator ust be carried out by the manufacture <b>s</b> ame protectors brage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st	(inside rotation to reduce t (Folding with the wheelcha O Right O Left O Right		CRASH TEST COCCUSION	07058 09811 11477 00836 00025 01046 00838 00837
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Pad for front fra O Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>Super Head re</li> <li>Transit wheels</li> <li>Tripping aid</li> <li>Crutches support</li> <li>Optional 2</li> <li>Gafety pelvic b</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st ort	(inside rotation to reduce t (Folding with the wheelcha O Right O Left O Right		CRASH TEST COCCUSION	07058 09811 11477 00836 00025 01046 00838 00837 04103 03972
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Pad for front fra O Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>Super Head re</li> <li>Super Head re</li> <li>Transit wheels</li> <li>Tipping aid</li> <li>Crutches support</li> <li>Optional 2</li> <li>Harness</li> <li>Safety pelvic b</li> <li>Tray table (rem</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st ort elt novable)	(inside rotation to reduce t (Folding with the wheelcha O Right O Left O Left	ir)	CRASH TEST COCCUS	07058 09811 11477 00836 00025 01046 00838 00837 04103 03972 00508
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Pad for front fra</li> <li>Pad for front fra</li> <li>Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>Super Head re</li> <li>Super Head re</li> <li>Transit wheels</li> <li>Tripping aid</li> <li>Crutches support</li> </ul> Optional 2 <ul> <li>Harness</li> <li>Safety pelvic b</li> <li>Tray table (rem</li> <li>Lumbar support</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st ort elt hovable) rt	(inside rotation to reduce t (Folding with the wheelcha O Right O Left O Right O Left (to insert in the backrest u	ir)	CRASH TEST COCOURTS	07058 09811 11477 00836 00025 01046 00838 00837 04103 03972 00508 00013
<ul> <li>O 4 points tie-dow The use of a h (installation million</li> <li>Pad for front fra O Removable sto</li> <li>Optional 1</li> <li>Anti-tipper with INCLUDED</li> <li>Super Head re</li> <li>Super Head re</li> <li>Transit wheels</li> <li>Tipping aid</li> <li>Crutches support</li> <li>Optional 2</li> <li>Harness</li> <li>Safety pelvic b</li> <li>Tray table (rem</li> </ul>	eadrest during transport is mandator <u>ust be carried out by the manufacture</u> <b>s</b> ame protectors orage bag (with quick coupling) rapid hookup ON THE BASIC PRICE st ort elt novable) rt Black	(inside rotation to reduce t (Folding with the wheelcha O Right O Left O Left	ir)	CRASH TEST CONTROL OF	07058 09811 11477 00836 00025 01046 00838 00837 04103 03972 00508



Date Order User Address

#### PHYSIO - Std. Backrest upholstery not provided

Removable with quick release Suitable for tubes with diameter 18÷26mm Depth adjustment (4cm) Angle adjustment (±18°)


## Posture backrest KID JUNIOR VERSION


• KIP Aluminum shell

WARNING: with this backrest the seat depth is reduced by 5 cm approx.

BACKREST HEIGHT		29	34	40	
Shell's shape	Lateral retaining wing R=regular				
		R	R	R	
3.5 cm					

### Posture backrest ADULT VERSION

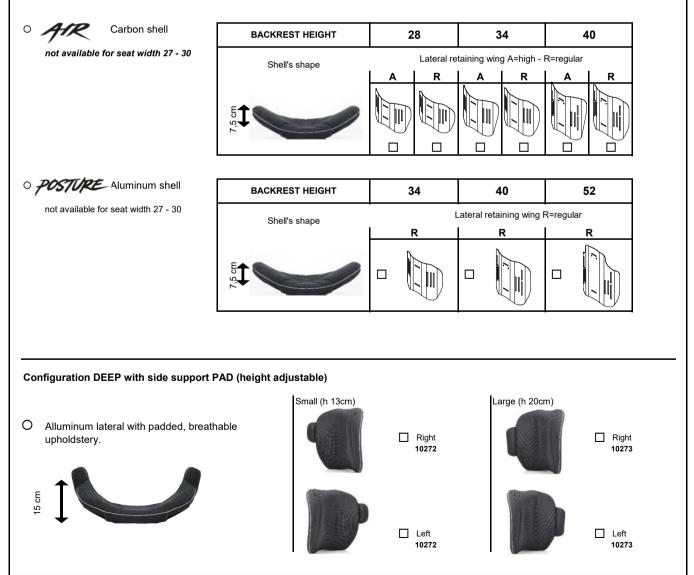

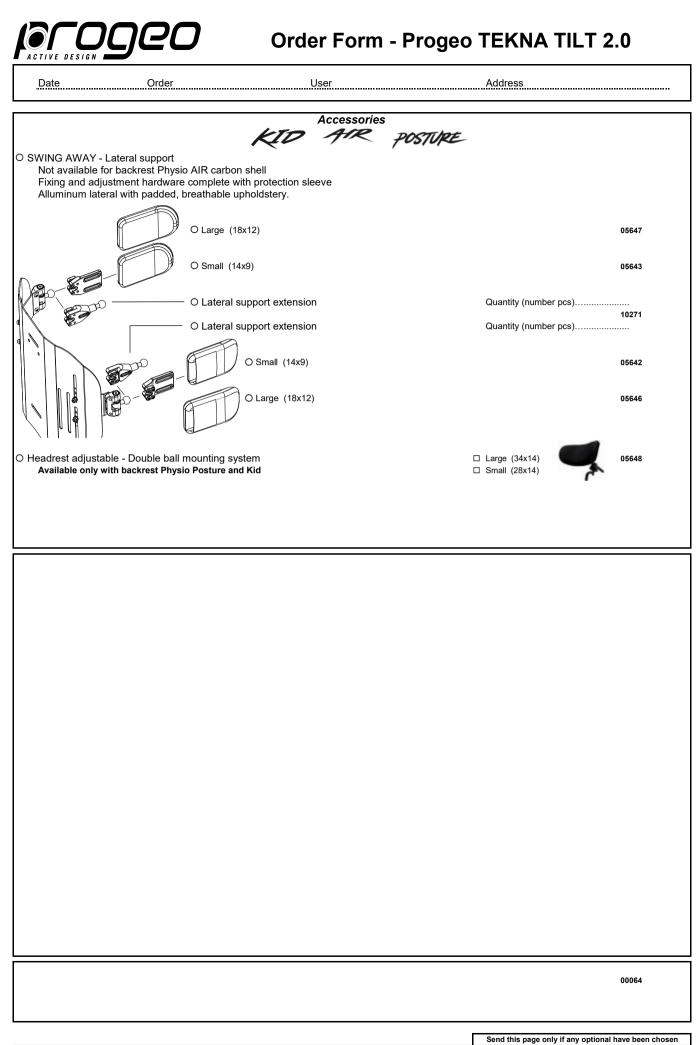

Wheelchair : Progeo TEKNA TILT 2.0 - Rev. 2024.1	Prices - VAT excluded	\$	standard	(supplied if no requests are indicated)
	to be added to the price list		on request	(without extra charge)
	-	0	optional	(cost to be added at the basic price)