## Progeo CARBOMAX

		Progeo (English)				
Date	Г		7			
User		Company stamp	(	R	igid frame whee	lchair
End user wheight (kg)						
Language user manual	Responsi	ible				
	<u>L</u>					
		Coulou filous fe				1
Wheelchair	measures - The tolera	Carbon fibre for		and/or required is	s + 10 mm	
Seat width (LS)	□ 36	□ 39		□ 45	□ 48	
The seat width is measured from t					<u> </u>	
Seat depth (PS) □ 35 The real seat depth, from the front	☐ 37,5 part of the seat cloth to the	☐ 40 e backrest tube will be 1,5	$\square$ 42,5 cm more than the	☐ 45 declared one.	□ 47,5	□ 50
Footplate distance (DP) (Real distance between seat and f	ootplate) - IMPORTANT NO			m 4cm !! (Minimum Fı	ront height = DP +	<u>- 4cm)</u>
Setting	☆ Standard	□ Prudential	□ Active	□ Extreme		
Backrest Height (TS)	Std.Value 33,5	(min 26-max 47)	adjustment ste	ps 1.5cm		
camber	☆ 0° □ 2°	□ 4°				
Front height STD 49			Rear height	STD 42		
			25" Rear v	vheel (min 38-max vheel (min 39-max vheel (min 40-max	47)	
	☆ Version mudguard (Available only with rear wheels 24")  □ Version straight sideguard					
Seat	at)					
O Seat with tension straps						08883
O Carbon rigid seat	-1					08336
O Pocket (under seat) [25x11x4	,5]					08281
STYLE						
O ALA ROSSA						07947
O ALA BIANCA						07948
Footplate				А	A	
☆ Carbon fibre footplate - adjustab	ole distance +/- 1,5cm.	SPECIAL FLIP-UP!				11530
Minimum footplate distance 35cm. IMPORTANT NOTICE! From the fo		um 6cm !! (Minimum Fro	ont height = DP + 4	4cm)		
Backrest adjustment and fixing	system					
<ul> <li>☆ Backrest with double locking (up</li> <li>□ Backrest with upright locking syst</li> <li>□ Fixed back(non-folding back)</li> </ul>		when folded) with rak	e adjustable fror e adjustable fror e adjustable fror	n -4° to +16°		



Date	Order	User	Address			
Backrest						
★ Adjustable velcro straps and padded transpiring upholstery  ★ Aluminium backrest						
			O Titanium backrest	06811		
			O Carbon fibre backrest	04389		
O AR Integrated po	sture backrest (NOT F	REMOVABLE)				
Carbon shell	I - Lateral retaining 7,5cn	n				
	for seat width 48	Sufferit ± 10	Inotallation and			
H 28	Н 34	H 40	Installation on:			
Backrest Height (TS) min 34	Backrest Height (TS) min 38	Backrest Height (TS) min 44	☐ Aluminium backrest			
()	()	()				
	retaining wing A=high - R=		O Titanium backrest	06811		
AR	A R	A R	O Carbon fibre backrest	04389		
Handle tube						
★ Tubes with standard ha	ndle					
☐ Tubes with short handle☐ SPORT tubes Without p	)					
○ Carbon fibre tubes with	short handle	Lig SIO - Posture backrest <i>I</i>	ghtest configuration	04390		
O Folding handles		Minimum backrest height		02958		
Casters						
☆ 4" Soft						
□ 3" Sport □ 5" Soft		Lightest configuration				
O 3" Active Soft (wide) O 4" Active Sport (narrow) O 4" Active Soft (wide) O 5" Active Soft (wide) O 5" Pneumatic	)	(Aluminium alloy rim) (Aluminium alloy rim) (Aluminium alloy rim) (Aluminium alloy rim)		06824 01398 03943 07518 10844		
Rear wheels						
Available with: VERSION MUDGUARD - VERSION STRAIGHT SIDEGUARD  ☆ 24" Ultra-light Progeo - Standard!						
O 24" ULTRA-LIGHT PROGEO KEY SPORT Lightest configuration				04383		
O 24" Ultra-light "Spinergy LXL" □ Black hub and white spokes □ Hub and spokes black O 24" Ultra-light "Spinergy Flex rim" Integrated aluminium/rubber handrim				01685 07846 02270 01392		
	Available only with: VERSION STRAIGHT SIDEGUARD					
☐ 22" Ultra-light Progeo - ☐ 25" Ultra-light Progeo - ☐ 26" Progeo - Standard!		(colour: black) (colour: black)				
<ul><li>25" Ultra-light "Spinergy</li><li>25" Ultra-light "Spinergy</li><li>26" Ultra-light "Spinergy</li></ul>	LXL"	□ Black hub and white spo	kes	02101 07847 02102		



Date Order User Address

Rear wheel tyre ☆ High pressure tyre (22"-24"-25"-26") Lightest configuration

☐ High pressure profile tyre (24")

O Marathon Plus 01669 (24"-25") with anti-puncture protection

O Anti-puncture - Colour Grey (22")04181

(24") 11083 O Anti-puncture - Colour Black

Not available with Rear wheels: 24" ULTRA-LIGHT PROGEO KEY SPORT, 24" Ultra-light "Spinergy LXL"

Wheel distance <b>☆</b> 3 cm	□ 4 cm	
(22"-24"-25"-26")	Lightest configuration	
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	09170
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	01684
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00016
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00017
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	00834
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11023
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11025
(24"-25")	(24" handrim, on 25" wheel is installed with spacers)	11026
ideal for quadriplegics)		
(25")	Oval countour with a rubber insert	06427
(24")		00693
ım handrim	Available for measures (22"- 24" - 26")	04050
	(22"-24"-25"-26")  (24"-25") (24"-25") (24"-25") (24"-25")  (24"-25")  (24"-25")  (24"-25")  ideal for quadriplegics)	(22"-24"-25")

Wheel locks	
☆ Bent lever push to lock	
☐ Straight lever push to lock ☐ Straight lever pull to lock	
O Sport brake	06428
O Brake with extension lever push to lock O Brake with extension lever pull to lock	01949 03372

Armrests 00694 **Tubolar armrests** (Swing away, removable and height adjustable armrest)

Accessories O Pad for front frame protectors 07058 O Backrest-seat connection cloth 10241 09811 O Removable storage bag (with quick coupling)

#### Optional 1

Optional 2 O Safety pelvic belt

O Harness

#### Only one optional devices for side can be chosen

O Transit wheels

O Anti-tipper with rapid hookup (inside rotation to reduce the encumbrance)

O Right

O Left

06822 03972 04103

03290

06821



Date	Order	User	Address
Optional 2 O Lumbar support O Tetraclip		(to insert in the backrest upholstery) (Quick release axle for quadriplegic)	00013 03947
Additional Kit	wheels	Off-Road tyre - aluminium handrim (black colour)	03378
O 24" FAT rear whee	els	FAT tyre 3" - aluminium handrim (black colour)	09357


#### **PHYSIO - Posture backrest**

#### (Std. Backrest upholstery not provided)

Removable with quick release Suitable for tubes with diameter 18÷26mm Depth adjustment (4cm) Angle adjustment (±18°)

Carbon shell

not available for seat width 48

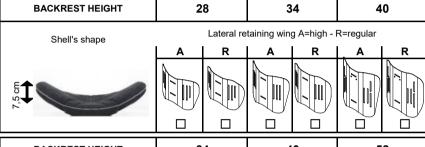




BACKREST HEIGHT	34		40		52	
Shell's shape	Lateral retaining wing R=regular					2
7,5 cm						

#### Configuration DEEP with side support PAD (height adjustable)

Alluminum lateral with padded, breathable upholdstery.








#### **SWING AWAY - Lateral support**

Fixing and adjustment hardware complete with protection sleeve

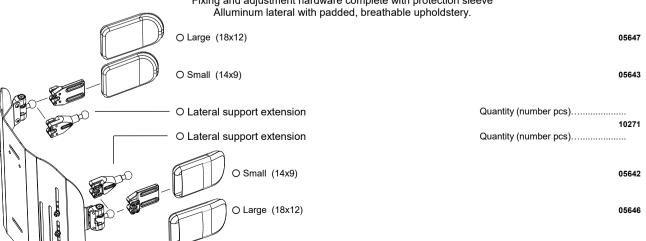



ACTIVE DESIGN				
Date	Order	User	Address	
				_
O Headrest adjustabl <b>Available only v</b>	e - Double ball mounting syste vith backrest Physio Posture	em <del>9</del>		<u>,</u>
				C
			☐ Large (34x14) ☐ Small (28x14)	05648

		Se	end this page only i	f any optional have been chosen
Wheelchair : Progeo CARBOMAX - Rev. 2024.1	Prices - VAT excluded	☆	standard	(supplied if no requests are indicated)
Wileelchail : Flogeo CARBOMAX - Rev. 2024.1	to be added to the price list		on request	(without extra charge)
		$\circ$	ontional	(cost to be added at the basic price)

Pag. 5 / 7 Progeo\_202401 Rev. 2024.1\_Apr



Date Order User Address

12" wheel - Motor 250W (750W maximum power) 14" wheel - Motor 1000W (1500W maximum power)

Color display with switcher Maximum speed limit settable from display 5 speed levels selectable

10 display-selectable acceleration levels

Adaptive Cruise Control

Disc and electronic brake control lever

Motor brake (adjustable in 10 levels from the display)

Electronic brake with control bottom (adjustable in 10 levels from the display)

Power regain when braking

Error messages management from display (with error history)

Rear gear beeper

48V - 5.8 Ah battery Autonomy up to 25km

48V - 11.6 Ah Power plus battery Autonomy up to 50km

Battery charger 48V

Rear gear


USB port

Easle Mudguard

Front spoiler with predisposition for FULL LED light

(Certified software)

O Mototronik



#### Handlebar

☆ STANDARD controls

 ☆ Thumb accelerator
 ☆ Right
 □ Left

 12592
 12593

 O Grip throttle
 O Right
 O Left

 10913
 10914

10905

#### O QUADRIPLEGIC controls

Handlebar PUSH&PULL

#### ★ MOTOTRONIK 12" wheel

Motor 250W (750W maximum power) Maximum speed according to law





10903

#### O MOTOTRONIK 14" wheel

Motor 1000W (1500W maximum power) Maximum speed according to law

Battery

☆ 48V - 5.8 Ah battery

Autonomy up to 25 km

O 48V - 11.6 Ah Power plus battery

Autonomy up to 50 km

Rev. 2024.1\_Apr



Date	Order	User	Address	
Accessories				
□ FULL LED light (hig Integrated in the	gh intensity) spoiler			10908
O Handlebar extensio Adjustable from 15o				10907
O Motor unit facilitated Recommended with	d unlock lever n handlebar for quadriplegic			10915
O Additional FLY 48V Autonomy up to Approved for air t	15km			10906
O Rearview mirror		O Right O Left		10909 10909
O Basket (removable)	) - (with KLICKfix® attachment system)			10912
O Removable front we (it increases the v	eight - (with KLICKfix® attachment syst weight over the power wheel to improve	em) e traction)		10910
O Travel bag				10916

#